
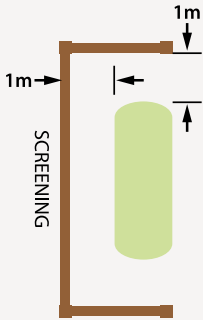
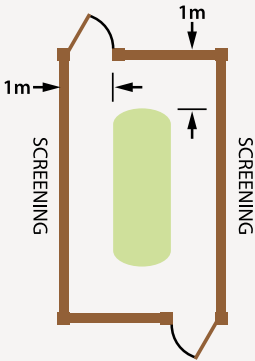
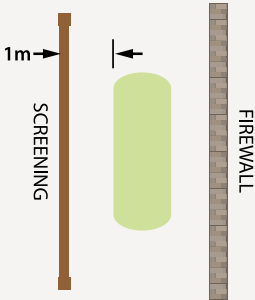


Tank Screening

A tank screen can be a useful tool to hide a gas tank. Please see below examples of screening for tanks up to 1.1 tonnes. For larger tanks screening should be 6m away.

	One side of the vessel only for evergreen shrubs or trees. Evergreen shrubs or trees can present a fire risk and need to be carefully positioned and maintained to ensure that they do not restrict access and that they do not grow nearer than 1m to the vessels or in an area extending vertically above such a distance to the vessels.	 Evergreen Hedge
	On no more than three sides (the fourth side being left clear for ventilation and delivery hose access) for open ranch type fence or wall, which obstructs no more than 50% of natural ventilation through the screened part.	 Open Screening Blocks  Ranch Type Fence
	On all four sides for open ranch type fence or wall, which obstructs no more than 50% of natural ventilation through the screened part provided that at least two equivalently ventilated means of exit, situated to minimise the distance to be travelled to escape from a dead end are provided. Gates or access should open outwards and be easily and immediately open-able from the inside, they should not be self locking, and should provide unobstructed means of escape.	 Hit & Miss Fencing
	On no more than two sides (the third and fourth sides being left clear for ventilation and delivery hose access); for closed panel type fence or wall (including a fire wall) which obstructs more than 50% of natural ventilation through the screened part.	 Closed Panel Fence